

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

U-015639-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

N/A

8. WELL NAME and NUMBER:

Bolinder Federal 3-12

9. API NUMBER:

4301530178

10. FIELD AND POOL, OR WLOCAT:

Grassy Trail 25

1. TYPE OF WELL

OIL WELL ☒GAS WELL ☐

OTHER

2. NAME OF OPERATOR:

Pride Ventures, LLC

3. ADDRESS OF OPERATOR:

P.O. Box 328

CITY Bloomfield

STATE NM

ZIP 87413

PHONE NUMBER:

(505) 325-7707

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 865' FNL 715' FWL

540723X 43669954 39.453442

-110.526693

COUNTRY: Emery

QUAD/CTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 12 16S 12E

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 6/18/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER:
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This is a producing oil well and we intend to increase the production by horizontal drilling as follows:

1. Prepare location by removing pumping equipment and working on wellhead, etc.
2. Move in rig lay down tubing and rods.
3. Run gauge ring with junk basket, gamma ray and cement bond logs with collar locator; Trip 2 will run hoist operation gyro.
4. Set 8 5/8" cast iron bridge plug with wireline @ 3560'.
5. Set whipstock with drill pipe at 3550' with gyro orientation at 135 azimuth - confirm down hole azimuth readings are corrected to true north - tag bridge plug with whipstock to set slips and anchor.
6. Mill window and dress until smooth.
7. Start building 18.48 azimuth with a 6 1/8" bit. Note: weight will be provided by 3 1/2" HWDP.
8. Continue drilling with 18.48 azimuth until we reach 90 degrees at 3660' vertical depth (production zone).
9. Start 992.29 to hold at 3836.94 MD.
10. Continue horizontal drilling to TD of 4829.23' (see attached Weatherford Horizontal Planning Report).
11. Circulate hole clean, lay down all drilling equipment and return well to production.

NOTE: TD of 4829.23 will end drill hole at 970' FNL and 1980' FWL.

54109X 39.452625
43669074 -110.522211

NAME (PLEASE PRINT) Robert G. Chenault

TITLE Registered Agent

SIGNATURE

DATE

3-19-09

(This space for State use only)

Approved by the
Utah Division of
Oil, Gas and Mining

(5/2000)

(See Instructions on Reverse Side)

Date: 04-29-09

By: [Signature]

Federal Approval of this
Action is Necessary



RECEIVED

APR 27 2009

DIV. OF OIL, GAS & MINING

Target Location Plat

SEC. 12, T. 16 S., R. 12 E. OF THE S.L.M.

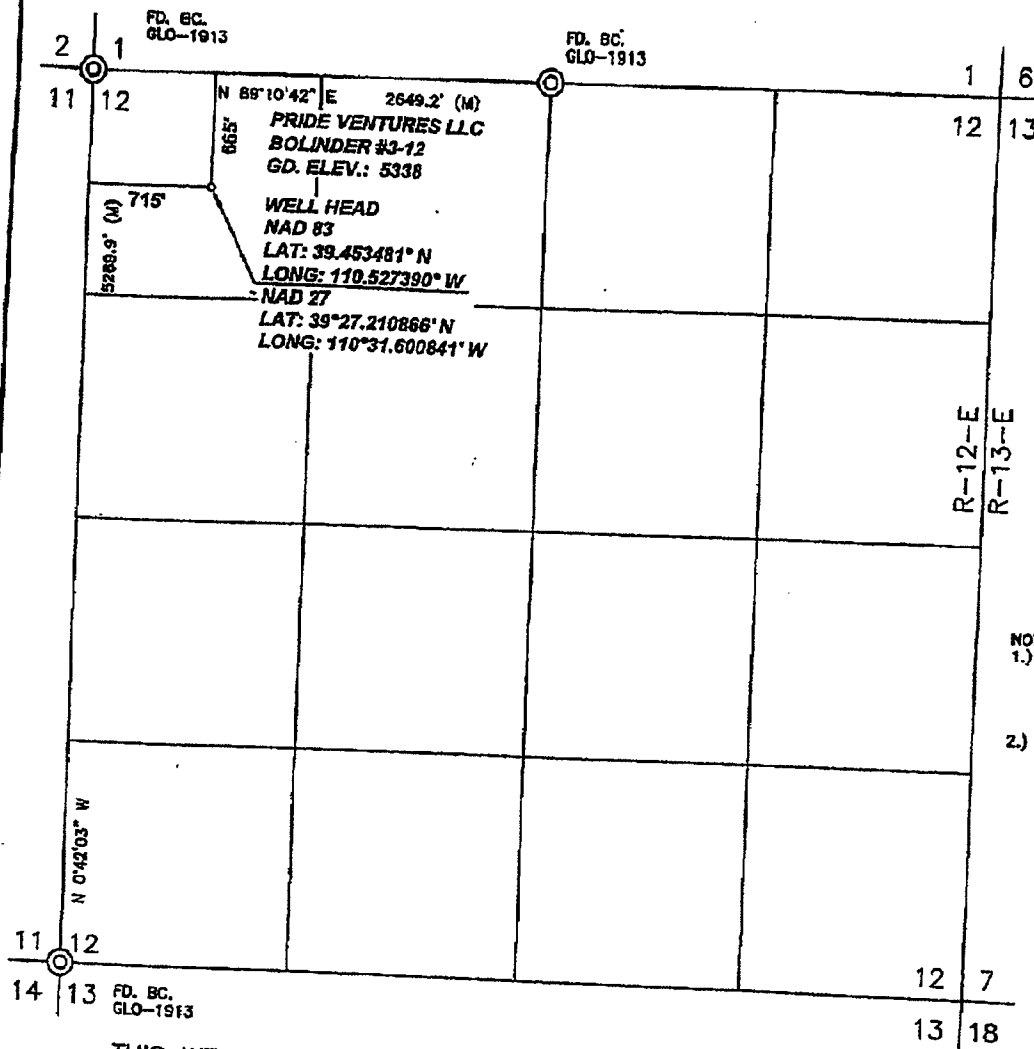

NOTES:

- 1.) BASIS OF BEARING - SET OPUS ADJ. CONTROL POINT "BASE" LOCATED IN THE SE/4, SEC. 35, T-15-S, R-12-E, S.L.M. GRID FACTOR: .999918822
- 2.) ALL POSS. AS SHOWN ARE UTAH STATE PLANE CENTRAL NAD 83.

REFERENCE DOCUMENTS

MOUNDS, UTAH
QUADRANGLE, USGS

SURFACE OWNER - STATE OF UTAH

THIS WELL LOCATION PLAT WAS PREPARED FOR PRIDE VENTURES LLC.
TO LOCATE THE BOLINDER #3-12, 665' F.N.L. &
715' F.W.L. IN THE NW 1/4 NW 1/4, OF SECTION 12, T. 16 S., R. 12 E.
OF THE S.L.M. EMERY COUNTY, UTAH

SURVEYOR'S CERTIFICATE

I, HENRY P. BROADHURST, JR., DULY LICENSED LAND SURVEYOR
IN THE STATE OF UTAH, HEREBY CERTIFY THAT THIS PLAT AND THE ACTUAL
SURVEY UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY
DIRECT SUPERVISION AND THAT THIS SURVEY MEETS THE MINIMUM
STANDARDS FOR SURVEYS IN THE STATE OF UTAH; AND THAT IT IS TRUE
AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

HENRY P. BROADHURST, JR.
UTAH P.L.S. No. 18369

8/20/08

DATE

SURVEYED	8/7/08
DRAWN	8/19/08
CHECKED	8/19/08

CCI

P.O. BOX 328
BLOOMFIELD, NM, 87413
PHONE (505) 325-7707

CHENAULT CONSULTING INC.